





## SUBMITTAL DATA SHEET

Wall Mounted Heat Pump System	
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

<b>Set Code</b>	22022010018155
Indoor unit code	22022011017161
Outdoor unit code	22022016016340
<b>Set Model</b>	
Indoor unit model	MIU-A36W-2
Outdoor unit model	MOU-A36G-2
<b>Certified</b>	
AHRI	
UL	



### SYSTEM PERFORMANCE DATA

<b>Power supply</b>		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
<b>Electrical</b>		
Minimum circuit ampacity(Outdoor)	(A)	28.0
Max.fuse(Outdoor)	(A)	35.0
Connection wiring		14AWG*4
<b>Cooling</b>		
Capacity	(Btu/h)	36000(8900~36300)
Power Input	(W)	4256(250~3620)
Current	(A)	18.4(1.1~15.7)
SEER2	(Btu/W)	17.5
EER2	(Btu/W)	8.5
<b>Heating</b>		
Capacity	(Btu/h)	36000(11400~37800)
Power Input	(W)	4270(700~4185)
Current	(A)	18.9(3~18.2)
HSPF2-4	(Btu/W)	8.7
HSPF2-5	(Btu/W)	6.8
COP	W/W	2.47
Heat at 17F(H32)	(Btu/h)	24000
Heat at 5F(H42)	(Btu/h)	17600
COP at 5F(H42)	W/W	1.97

### REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV+Capillary
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	119.93
Refrigerant precharge	(ft)	25.0
	(m)	7.5
Additional charge for each ft	(oz/ft)	0.32
Additional charge for each m	(g/m)	30.0
Liquid side/ Gas side(indoor)	(inch)	3/8"/5/8"
	(mm)	9.52/15.9
Liquid side/ Gas side(outdoor)	(inch)	3/8"/5/8"
	(mm)	9.52/15.9
Max. pipe length	(ft)	213.3
	(m)	65.0
Max. difference in level	(ft)	98.4
	(m)	30.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	62~90
	(Deg. °C)	17~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30
Outdoor(cooling)	(Deg. °F)	5~122
	(Deg. °C)	-15~50
Outdoor(heating)	(Deg. °F)	5~86
	(Deg. °C)	-15~30


### INDOOR UNIT DATA

<b>Indoor fan motor</b>		
Model		ZKFP-58-8-1-5
Qty		1
Input	(W)	58.00
Output	(W)	58.0
RLA	(A)	0.5
Speed(Hi/Mi/Lo)	(r/min)	1200/950/750
<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	882.35/732.35/517.65/400.00
Indoor noise level (Hi/Med/Lo)	[dB(A)]	56.5/54.5/40
<b>Dehumidification</b>	(L/H)	4.72
<b>Indoor unit</b>		
Dimension (WxDxH)	(inch)	49.57x11.10x14.25
	(mm)	1259x282x362
Packing(WxDxH)	(inch)	52.76x17.72x15.16
	(mm)	1340x450x385
Net/Gross weight	(lbs.)	40.34/52.69
	(kg)	18.3/23.9

### OUTDOOR UNIT DATA

<b>Compressor</b>		
Type		ROTARY
Model		KTF250D22UMT
Brand		GMCC
Capacity	(Btu/h)	27620
Input	(W)	2200
Rated current (RLA)	(A)	18
Refrigerant oil/oil charge	(ml)	VG74/670
<b>Outdoor fan motor</b>		
Model		ZKFN-120-8-2
Qty		1
Input	(W)	150.0
Output	(W)	120
RLA	(A)	0.5
Speed	(r/min)	1150/1050/900/850
<b>Air flow &amp; Noise level</b>		
Outdoor air flow (Max.)	(CFM)	2235
Outdoor noise level	[dB(A)]	63.5
<b>Outdoor unit</b>		
Dimension (WxDxH)	(inch)	37.24x16.14x31.89
	(mm)	946x410x810
Packing (WxDxH)	(inch)	42.91x19.69x34.84
	(mm)	1090x500x885
Net/ Gross weight	(lbs.)	150.13/158.95
	(kg)	68.1/72.1

Indoor unit dimension

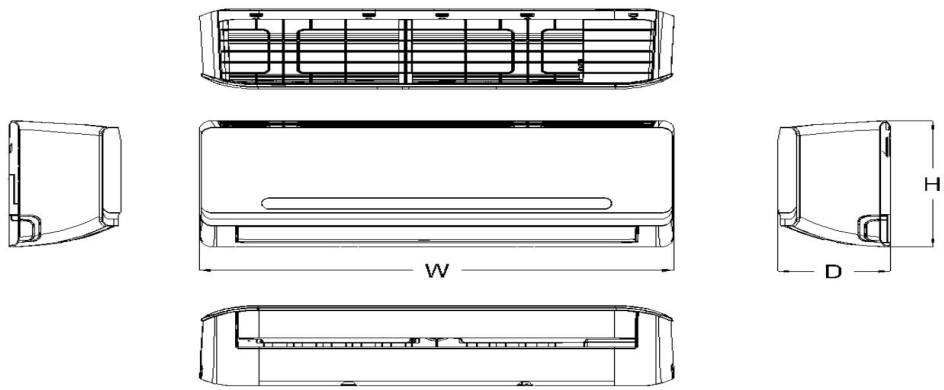

Capacity	Body Code	W(mm)	D(mm)	H(mm)
7K~9K	A	722	187	290
9K~12K	B	802	189	297
12K~18K	D	965	215	319
18K~24K	E	1080	226	335
27K~36K	F	1259	282	362
30K~36K	G	1350	272	365

Outdoor unit dimension

