



## SUBMITTAL DATA SHEET

AHU Heat Pump System	
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

<b>Set Code</b>	22023110000893
Indoor unit code	22023111000270
Outdoor unit code	22023116000163
<b>Set Model</b>	
Indoor unit model	MIU-A30V-4
Outdoor unit model	MOU-A30VH-4
<b>Certified</b>	
AHRI	
UL	




SYSTEM PERFORMANCE DATA			
<b>Power supply</b>			
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz	
Voltage Range	(V)	187-253	
<b>Electrical</b>			
Minimum circuit ampacity(Outdoor)	(A)	23.0	
Max.fuse(Outdoor)	(A)	35.0	
Connection wiring		14AWG*2 Stranded, shielded	
<b>Cooling</b>			
Capacity	(Btu/h)	30000(10000~33600)	
Power Input	(W)	3060(370~3360)	
Current	(A)	13.2(2.9~15)	
SEER2	(Btu/W)	16.2	
EER2	(Btu/W)	9.8	
<b>Heating</b>			
Capacity	(Btu/h)	33000(11500~37000)	
Power Input	(W)	2930(550~3250)	
Current	(A)	13.3(4.0~14.6)	
HSPF2-4	(Btu/W)	8.9	
HSPF2-5	(Btu/W)	7.0	
COP	W/W	3.30	
Heat at 17F(H32)	(Btu/h)	21000	
Heat at 5F(H42)	(Btu/h)	24000	
COP at 5F(H42)	W/W	1.77	

REFRIGERANT PIPE DATA			
Throttle type	Indoor unit	EEV for cooling	
Design pressure	Outdoor unit	EEV for heating	
Refrigerant Type	(PSIG)	550/340	
Refrigerant charge	oz	R410A	134.04
Refrigerant precharge	(ft)	25.0	7.5
Additional charge for each ft	(oz/ft)	0.69	65.0
Additional charge for each m	(g/m)	3/8" / 3/4"	9.52/19
Liquid side/ Gas side(indoor)	(mm)	3/8" / 3/4"	9.52/19
Liquid side/ Gas side(outdoor)	(mm)	3/8" / 3/4"	9.52/19
Max. pipe length	(ft)	164.0	50.0
Max. difference in level	(ft)	82.0	25.0
Connection method	(m)	Flared	
Indoor(cooling)	(Deg. °F)	60~90	16~32
	(Deg. °C)	16~32	32~86
Indoor(heating)	(Deg. °F)	32~86	0~30
	(Deg. °C)	0~30	5~122
Outdoor(cooling)	(Deg. °F)	5~122	-15~50
	(Deg. °C)	-15~50	-22~75
Outdoor(heating)	(Deg. °F)	-22~75	-30~24
	(Deg. °C)	-30~24	

INDOOR UNIT DATA			
<b>Indoor fan motor</b>			
Model		ZKFD-375-8-1-1	
Qty		1	
Input	(W)	/	
Output	(W)	/	
RLA	(A)	3.5	
Speed(Hi/Mi/Lo)	(r/min)	/	
<b>Air flow &amp; Noise level</b>			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	1088.24/894.12/805.88/711.76	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	42/40.5/36.5	
Dehumidification	(L/H)	3.41	
<b>Indoor unit</b>			
Dimension (WxDxH)	(inch)	21.02x21.02x49.02	
	(mm)	534x534x1245	
Packing(WxDxH)	(inch)	26.57x24.41x52.56	
	(mm)	675x620x1335	
Net/Gross weight	(lbs.)	129.19/155.64	
	(kg)	58.6/70.6	
<b>Accessories</b>			
Adaptor for welding(3/4")	Qty	1	
Adaptor for welding(3/8")	Qty	1	

OUTDOOR UNIT DATA			
<b>Compressor</b>			
Type		ROTARY	
Model		KTF310D43UMT	
Brand		GMCC	
Capacity	(Btu/h)	34154	
Input	(W)	2765	
Rated current (RLA)	(A)	16.5	
Refrigerant oil/oil charge	(ml)	VG74/1000	
<b>Outdoor fan motor</b>			
Model		ZKFN-120-8-2	
Qty		1	
Input	(W)	150.0	
Output	(W)	120	
RLA	(A)	1.4	
Speed	(r/min)	950/900/500	
<b>Air flow &amp; Noise level</b>			
Outdoor air flow (Max.)	(CFM)	3000	
Outdoor noise level	[dB(A)]	60.5	
<b>Outdoor unit</b>			
Dimension (WxDxH)	(inch)	37.24x16.14x31.89	
	(mm)	946x410x810	
Packing (WxDxH)	(inch)	42.91x19.69x34.84	
	(mm)	1090x500x885	
Net/ Gross weight	(lbs.)	159.83/169.75	
	(kg)	72.5/77	
<b>Accessories</b>			
Adaptor for welding(3/4")	Qty	1	
Adaptor for welding(3/8")	Qty	1	

Indoor unit dimension

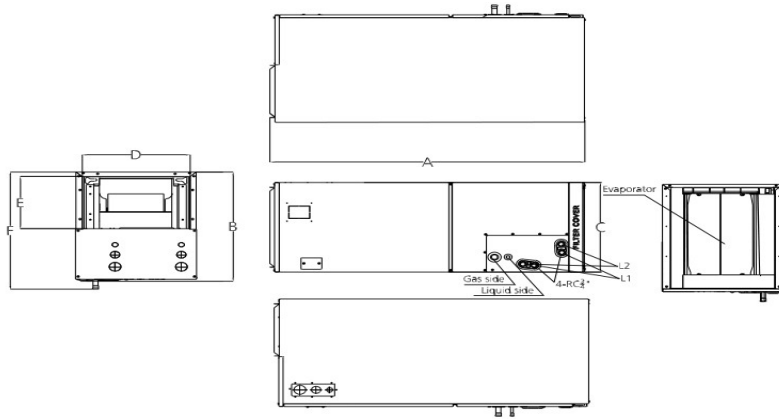

Model	Unit	Dimensions(mm)						Drain hole	
		A	B	C	D	E	F	L1	L2
18k~24k	mm	1143	534	445	400	260	585	Main drain	Overflow drain
	inch	45	21	17-1/2	15-3/4	10-1/4	23		
30k-48k	mm	1245	534	534	490	260	585		
	inch	49	21	21	19-5/16	10-1/4	23		
60k	mm	1346	534	622	580	260	585		
	inch	53	21	24-1/2	22-7/8	10-1/4	23		

Outdoor unit dimension

