



## SUBMITTAL DATA SHEET

AHU Heat Pump System	
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

<b>Set Code</b>	22023110000891
Indoor unit code	22023111000272
Outdoor unit code	22023116000141
<b>Set Model</b>	
Indoor unit model	MIU-A48V-4
Outdoor unit model	MOU-A48VH-4
<b>Certified</b>	
AHRI	
UL	




SYSTEM PERFORMANCE DATA			
<b>Power supply</b>			
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz	
Voltage Range	(V)	187-253	
<b>Electrical</b>			
Minimum circuit ampacity(Outdoor)	(A)	42.0	
Max.fuse(Outdoor)	(A)	50.0	
Connection wiring		14AWG*2 Stranded, shielded	
<b>Cooling</b>			
Capacity	(Btu/h)	47000(15000~48000)	
Power Input	(W)	5731(815~5700)	
Current	(A)	24.95(3.54~25.3)	
SEER2	(Btu/W)	15.6	
EER2	(Btu/W)	8.2	
<b>Heating</b>			
Capacity	(Btu/h)	50000(11000~55000)	
Power Input	(W)	4652(830~5700)	
Current	(A)	21.20(3.60~26)	
HSPF2-4	(Btu/W)	9.4	
HSPF2-5	(Btu/W)	7.7	
COP	W/W	3.15	
Heat at 17F(H32)	(Btu/h)	36000	
Heat at 5F(H42)	(Btu/h)	46000	
COP at 5F(H42)	W/W	1.90	

REFRIGERANT PIPE DATA			
Throttle type	Indoor unit	EEV for cooling	
Design pressure	Outdoor unit	EEV for heating	
Refrigerant Type	(PSIG)	550/340	
Refrigerant charge		R410A	
Refrigerant precharge	oz	169.31	
Additional charge for each ft	(ft)	25.0	
Additional charge for each m	(m)	7.5	
Liquid side/ Gas side(indoor)	(oz/ft)	0.69	
Liquid side/ Gas side(outdoor)	(g/m)	65.0	
Max. pipe length	(inch)	3/8" / 3/4"	
Max. difference in level	(mm)	9.52/19	
Connection method	(inch)	3/8" / 3/4"	
Indoor(cooling)	(mm)	9.52/19	
Indoor(heating)	(ft)	213.3	
Outdoor(cooling)	(m)	65.0	
Outdoor(heating)	(ft)	98.4	
Indoor(cooling)	(m)	30.0	
Indoor(heating)	(m)	Flared	
Outdoor(cooling)	(Deg. °F)	60~90	
Outdoor(heating)	(Deg. °C)	16~32	
Indoor(cooling)	(Deg. °F)	32~86	
Indoor(heating)	(Deg. °C)	0~30	
Outdoor(cooling)	(Deg. °F)	5~122	
Outdoor(heating)	(Deg. °C)	-15~50	
Outdoor(cooling)	(Deg. °F)	-22~75	
Outdoor(heating)	(Deg. °C)	-30~24	

INDOOR UNIT DATA			
<b>Indoor fan motor</b>			
Model		ZKFD-560-8-1-1	
Qty		1	
Input	(W)	/	
Output	(W)	/	
RLA	(A)	6.0	
Speed(Hi/Mi/Lo)	(r/min)	/	
<b>Air flow &amp; Noise level</b>			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	470.59/1282.35/1094.12/905.88	
Indoor noise level (Hi/Med/Lo)	[dB(A)]	50/47/43.5	
Dehumidification	(L/H)	4.96	
<b>Indoor unit</b>			
Dimension (WxDxH)	(inch)	21.02x21.02x49.02	
Packing(WxDxH)	(mm)	534x534x1245	
Net/Gross weight	(inch)	26.57x24.41x52.56	
Adaptor for welding(3/4")	(mm)	675x620x1335	
Adaptor for welding(3/8")	(lbs.)	130.51/156.31	
Accessories	(kg)	59.2/70.9	
Adaptor for welding(3/4")	Qty	1	
Adaptor for welding(3/8")	Qty	1	

OUTDOOR UNIT DATA			
<b>Compressor</b>			
Type		ROTARY	
Model		EAPQ420D1UMUA	
Brand		GMCC	
Capacity	(Btu/h)	44015	
Input	(W)	3565 ±3%	
Rated current (RLA)	(A)	33	
Refrigerant oil/oil charge	(ml)	1460±15ml	ESTER OIL VG74
<b>Outdoor fan motor</b>			
Model		ZKFN-85-8-22-5	
Qty		2	
Input	(W)	126.0	
Output	(W)	85	
RLA	(A)	1.2	
Speed	(r/min)	850/750/650	
<b>Air flow &amp; Noise level</b>			
Outdoor air flow (Max.)	(CFM)	4412	
Outdoor noise level	[dB(A)]	64.0	
<b>Outdoor unit</b>			
Dimension (WxDxH)	(inch)	37.48x16.34x52.48	
Packing (WxDxH)	(mm)	952x415x1333	
Net/ Gross weight	(inch)	43.11x19.49x58.27	
Adaptor for welding(3/4")	(mm)	1095x495x1480	
Adaptor for welding(3/8")	(lbs.)	220.24/248.90	
Accessories	(kg)	99.9/112.9	
Adaptor for welding(3/4")	Qty	1	
Adaptor for welding(3/8")	Qty	1	

Indoor unit dimension

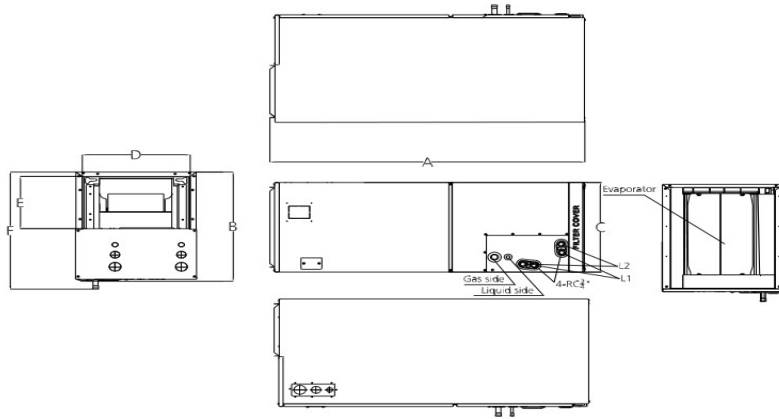

Model	Unit	Dimensions(mm)						Drain hole	
		A	B	C	D	E	F	L1	L2
18k~24k	mm	1143	534	445	400	260	585	Main drain	Overflow drain
	inch	45	21	17-1/2	15-3/4	10-1/4	23		
30k~48k	mm	1245	534	534	490	260	585		
	inch	49	21	21	19-5/16	10-1/4	23		
60k	mm	1346	534	622	580	260	585		
	inch	53	21	24-1/2	22-7/8	10-1/4	23		

Outdoor unit dimension

