



## SUBMITTAL DATA SHEET

### AHU Heat Pump System

Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

<b>Set Code</b>	22023110000907
Indoor unit code	22023111000252
Outdoor unit code	22023116000083
<b>Set Model</b>	
Indoor unit model	MIU-A60V-4
Outdoor unit model	MOU-A60V-4
<b>Certified</b>	
AHRI	
UL	



### SYSTEM PERFORMANCE DATA

<b>Power supply</b>		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
<b>Electrical</b>		
Minimum circuit ampacity(Outdoor)	(A)	34.0
Max.fuse(Outdoor)	(A)	60.0
Connection wiring		14AWG*2 Stranded, shielded
<b>Cooling</b>		
Capacity	(Btu/h)	57000(12800~60200)
Power Input	(W)	6475(700~6450)
Current	(A)	29(5.0~29)
SEER2	(Btu/W)	14.7
EER2	(Btu/W)	8.8
<b>Heating</b>		
Capacity	(Btu/h)	60000(12000~63100)
Power Input	(W)	5085(865~6086)
Current	(A)	20.9(6.4~26.5)
HSPF2-4	(Btu/W)	8.5
HSPF2-5	(Btu/W)	6.7
COP	W/W	3.46
Heat at 17F(H32)	(Btu/h)	37000
Heat at 5F(H42)	(Btu/h)	34600
COP at 5F(H42)	W/W	1.90

### REFRIGERANT PIPE DATA

Throttle type	Indoor unit	EEV for cooling
	Outdoor unit	EEV for heating
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	172.84
Refrigerant precharge	(ft)	25.0
	(m)	7.5
Additional charge for each ft	(oz/ft)	0.69
Additional charge for each m	(g/m)	65.0
Liquid side/ Gas side(indoor)	(inch)	3/8" / 7/8"
	(mm)	9.52/22
Liquid side/ Gas side(outdoor)	(inch)	3/8" / 7/8"
	(mm)	9.52/22
Max. pipe length	(ft)	213.3
	(m)	65.0
Max. difference in level	(ft)	98.4
	(m)	30.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	60~90
	(Deg. °C)	16~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30
Outdoor(cooling)	(Deg. °F)	5~122
	(Deg. °C)	-15~50
Outdoor(heating)	(Deg. °F)	5~75
	(Deg. °C)	-15~24


### INDOOR UNIT DATA

<b>Indoor fan motor</b>		
Model		ZKFD-750-8-1-1
Qty		1
Input	(W)	/
Output	(W)	/
RLA	(A)	#REF!
Speed(Hi/Mi/Lo)	(r/min)	/
<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	05.88/1582.35/1358.82/1135.29
Indoor noise level (Hi/Med/Lo)	[dB(A)]	52/48/43
<b>Dehumidification</b>	(L/H)	5.2
<b>Indoor unit</b>		
Dimension (WxDxH)	(inch)	21.02x24.49x52.99
	(mm)	534x622x1346
Packing(WxDxH)	(inch)	27.95x26.77x56.50
	(mm)	710x680x1435
Net/Gross weight	(lbs.)	162.70/192.90
	(kg)	73.8/87.5
<b>Accessories</b>		
Adaptor for welding(7/8")	Qty	1
Adaptor for welding(3/8")	Qty	1

### OUTDOOR UNIT DATA


<b>Compressor</b>		
Type		ROTARY
Model		KTQ420D1UMU
Brand		GMCC
Capacity	(Btu/h)	46744
Input	(W)	3700
Rated current (RLA)	(A)	24.6
Refrigerant oil/oil charge	(ml)	VG74/1400
<b>Outdoor fan motor</b>		
Model		ZKFN-85-8-22-5
Qty		2
Input	(W)	126.0
Output	(W)	85
RLA	(A)	2.4
Speed	(r/min)	900/850/650
<b>Air flow &amp; Noise level</b>		
Outdoor air flow (Max.)	(CFM)	4412
Outdoor noise level	[dB(A)]	60.0
<b>Outdoor unit</b>		
Dimension (WxDxH)	(inch)	37.48x16.34x52.48
	(mm)	952x415x1333
Packing (WxDxH)	(inch)	43.11x19.49x58.27
	(mm)	1095x495x1480
Net/ Gross weight	(lbs.)	217.15/248.46
	(kg)	98.5/112.7
<b>Accessories</b>		
Adaptor for welding(7/8")	Qty	1
Adaptor for welding(3/8")	Qty	1

Indoor unit dimension

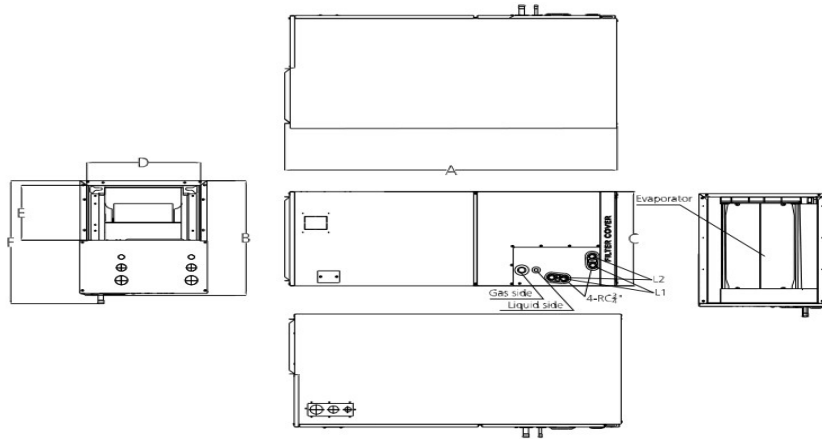

Model	Unit	Dimensions(mm)						Drain hole	
		A	B	C	D	E	F	L1	L2
18k~24k	mm	1143	534	445	400	260	585	Main drain	Overflow drain
	inch	45	21	17-1/2	15-3/4	10-1/4	23		
30k~48k	mm	1245	534	534	490	260	585		
	inch	49	21	21	19-5/16	10-1/4	23		
60k	mm	1346	534	622	580	260	585		
	inch	53	21	24-1/2	22-7/8	10-1/4	23		

Outdoor unit dimension

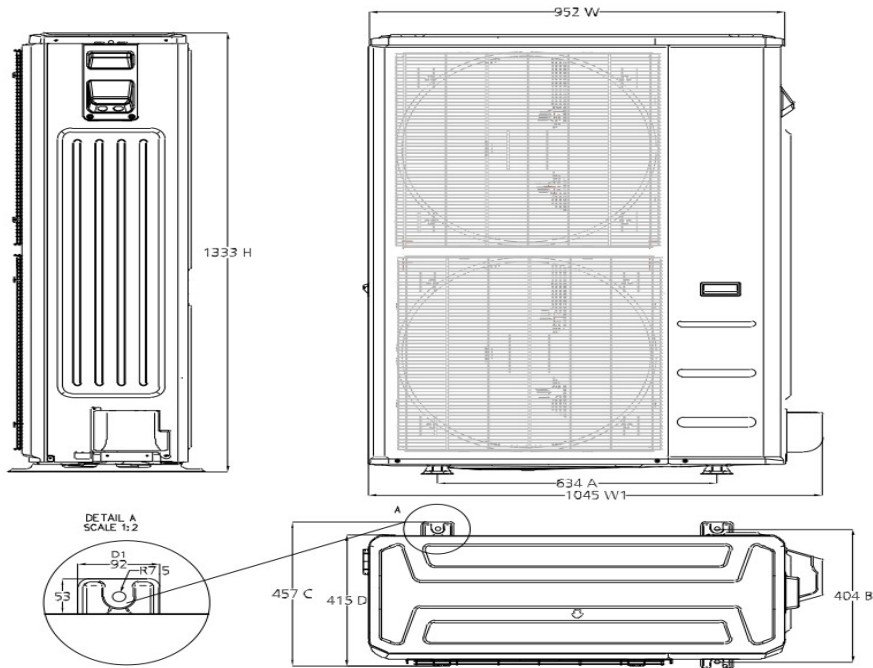

Fan performance

